




Lippage is a HUGE ISSUE
 It's our TURN to HELP

The only one with **2** elements

Save **3** pieces on intersections

PATENT
 Multiple solutions

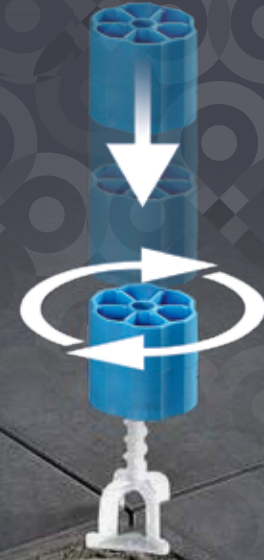

Sede /Headquarter
Progress Profiles SpA
 Via Le Marze 7
 31011 ASOLO (TV) Italy
 Tel. +39 0423 950398
 Fax +39 0423 950979
 Azienda certificata
 UN EN ISO 9001:2008
info@progressprofiles.com
www.progressprofiles.com

Filiale /Branch Office & Warehouse
Progress Profiles Middle East LLC
 Al ATTAR TOWER
 Office 204
 SHEIKH ZAYED ROAD
 Tel. 00971-4-3251499
 Fax. 00971-4-3251466
 P.O.BOX: 29101
 DUBAI, U.A.E
uae@progressprofiles.com

Filiale /Branch Office & Warehouse
Progress Profiles America Inc.
 4, Middlebury Boulevard (Unit 14)
 Randolph, New Jersey 07869
 U.S.A
 Tel. 973 584 2654
 Fax 973 584 2657
 e-mail: usa@progressprofiles.com



**T-shaped leveler
 installation.**



**Linear leveler
 installation.**

ADVANTAGES

- 1 Simple and quick to lay **with only 2 elements: Leveler & Cap.**
No need for expensive hand tools.
- 2 The unique system in the world that offers you a **wide range of leveller from 1, 2, 3, till 5 mm.** You will be able to level the "T" intersections with a **unique piece**, in this way you can spare 3 pieces for the intersections and 2 pieces for the "T"
- 3 The only System capable of leveling 3 to 40 mm floors and wall coverings with only 2 parts: **Leveler & Cap.**
Simply flip the cap over to work with various thicknesses.
- 4 Current joint sizes are 1 mm, 2 mm, 3 mm and 5 mm with more in development.
- 5 Vertical compression reduces movement and widening of joints.
- 6 The thin base of the leveler allows for easy placement without mortar accumulation.
- 7 The shaped hole in the middle of the cross-and T-shaped levelers allow a perfect control of the tiles lining up. Moreover the holes on their base enable a perfect anchoring between adhesive and tile.



Kicking the clip in the direction of the joint.



Remover: fixed on a drill allows to remove levelers from caps (Anticlockwise)

DESCRIPTION

Proleveling System is a revolutionary and innovative leveling system when laying medium and large materials with a thickness between 3 and 40 mm.

The patented system is made of 2 elements:

- A **leveling** base (1-2-3-5 mm size) with spaced notches that allow spacing/separating/ joining floors of any type and material in a way that is: linear, cross and half cross with joints to be chosen between 1 mm, 2 mm, 3 mm and 5 mm.
- The threaded stem is attached perpendicularly to the base in a way that allows for easy adjustment with **turns** of the **cap** during installation. Removal of the **cap** and Stem after the materials are set is made easy with strategically placed breakage points that release using a plastic hummer or by kicking in the direction of the joint. One cap fits all threaded stems and can be reused an infinite amount of times for big cost savings.

The new PPLS (patented) system assists in the reduction or elimination of ledging and lippage in the installation of various types of materials that are applied to floors or walls with mortar including: Large Format Tile, Natural Stone, Thin Profile Tile and many others.

LAYING SYSTEM

- a) Choose the desired type of Leveler (spacers) based on the requested joints and joining:
 - 1 mm Linear, Cross and Half Cross Version
 - 2 mm Linear, Cross and Half Cross Version
 - 3 mm Linear, Cross and Half Cross Version
 - 5 mm Linear, Cross and Half Cross Version
- b) Apply the thinset or mortar on a level base with the proper notched trowel as called out in the setting materials manufacturer's installation instructions.
- c) During the application of the tile or other materials, position the base of the chosen Leveler under the edge of the tile at the appropriate joint location and continue laying in sequence.
- d) Attach the cap to the threaded stem by rotating it clockwise. Level the joint by rotating the cap using the minimum amount of pressure needed.
- e) Once the setting materials have become solid and the floor or wall is ready for grout:
 - Kick the cap in the direction of the joint to detach connection points between Base and stem.

TECHNICAL SPECIFICATIONS



**PRSL 1
PRSL 2
PRSL 3
PRSL 5**

**PRST 1
PRST 2
PRST 3
PRST 5**

**PRSC 1
PRSC 2
PRSC 3
PRSC 5**

PRST

LINEAR LEVELER PROLEVELING SYSTEM

Article	thick mm	Pack Pcs.	Box
PRSL 1	1	100	3000 Pcs
PRSL 2	2	100	3000 Pcs
PRSL 3	3	100	3000 Pcs
PRSL 5	5	100	3000 Pcs

"T" LEVELER PROLEVELING SYSTEM

Article	thick mm	Pack Pcs.	Box
PRST 1	1	100	3000 Pcs
PRST 2	2	100	3000 Pcs
PRST 3	3	100	3000 Pcs
PRST 5	5	100	3000 Pcs

CROSS LEVELER PROLEVELING SYSTEM

Article	thick mm	Pack Pcs.	Box
PRSC 1	1	100	3000 Pcs
PRSC 2	2	100	3000 Pcs
PRSC 3	3	100	3000 Pcs
PRSC 5	5	100	3000 Pcs

ROTATING POMMEL CAP FOR LEVELER PROLEVELING SYSTEM

Article	Pack Pcs.	Box
PRST	50	1000 Pcs

REMOVER

Article	Pack Pcs.	Box
PRSSV	50	1000 Pcs

PROTECTION CUP

Article	Pack Pcs.	Box
PRSPC	50	800 Pcs



It protects the marble and natural stones surface from scratches that could caused be provoked by the cap during the floor levelling.

Tiles cm x cm	30 X 30	40 X 40	45 X 45	50 X 50	60 X 60	80 X 80	90 X 90	120 X 120
U. / MQ (Type of leveler)*	11 (only +)	6 (only +)	5 (only +)	4 (only +)	3 (only +)	5 (+2, L3)	5 (+2, L3)	3 (+1, L2)

* + = cross leveler, L = linear leveler, T = "T" shape leveler

Tiles cm x cm	30 X 60	40 X 80	45 X 90	120 X 30	100 X 50	120 X 60
U. / MQ (Type of leveler)*	6 (only +)	6 (+3, L3)	6 (+3, L3)	6 (+3, L3)	4 (+2, L2)	4 (+2, L2)

* + = cross leveler, L = linear leveler, T = "T" shape leveler

Tiles cm x cm	10 X 100	12 X 100	15 X 100	20 X 100	10 X 120	12 X 120	15 X 120	20 X 120	10 X 80	12 X 80	15 X 80	20 X 80	40 X 80	45 X 90	100 X 50	120 X 60
U. / MQ (Type of leveler)*	20 (only T)	17 (only T)	14 (only T)	10 (only T)	17 (only T)	14 (only T)	11 (only T)	9 (only T)	25 (only T)	21 (only T)	17 (only T)	13 (only T)	6 (only T)	5 (only T)	4 (only T)	4 (only T)

* + = cross leveler, L = linear leveler, T = "T" shape leveler